



CSIE30600/CSIEB0290
Database Systems

Lecture 9:
ER/EER to Relational
Mapping

Outline

- **ER-to-Relational Mapping Algorithm**
 - Step 1: Mapping of Regular Entity Types
 - Step 2: Mapping of Weak Entity Types
 - Step 3: Mapping of Binary 1:1 Relation Types
 - Step 4: Mapping of Binary 1:N Relationship Types.
 - Step 5: Mapping of Binary M:N Relationship Types.
 - Step 6: Mapping of Multivalued attributes.
 - Step 7: Mapping of N-ary Relationship Types.
- **Mapping EER Model Constructs to Relations**
 - Step 8: Options for Mapping Specialization or Generalization.
 - Step 9: Mapping of Union Types (Categories).

CSIE30600/CSIEB0290 Database Systems ER/EER to Relational Mapping 2

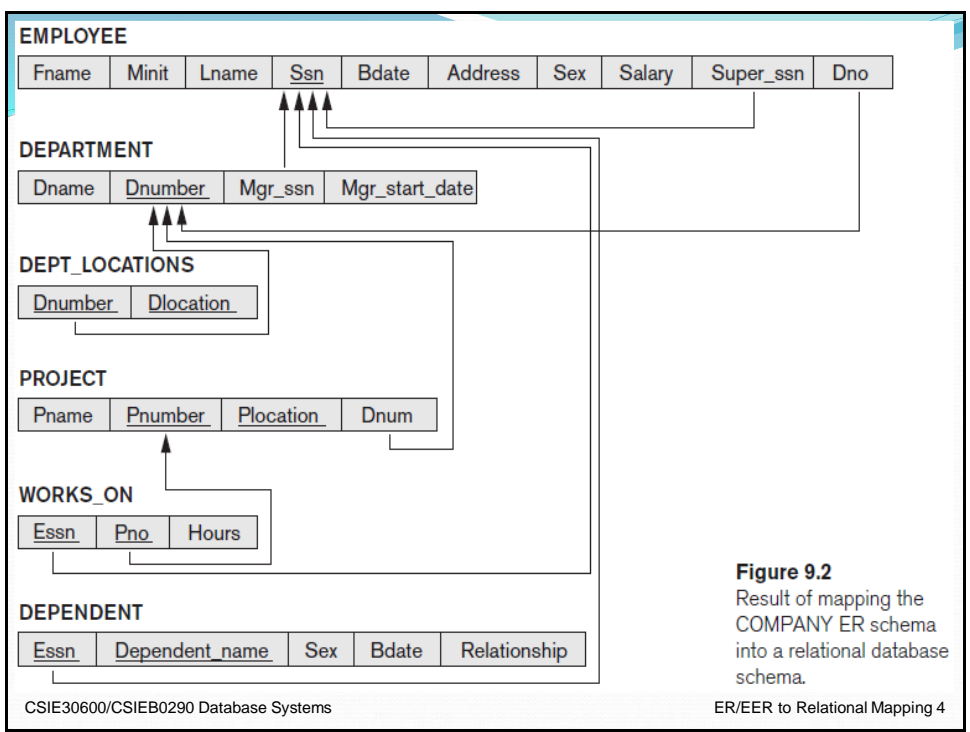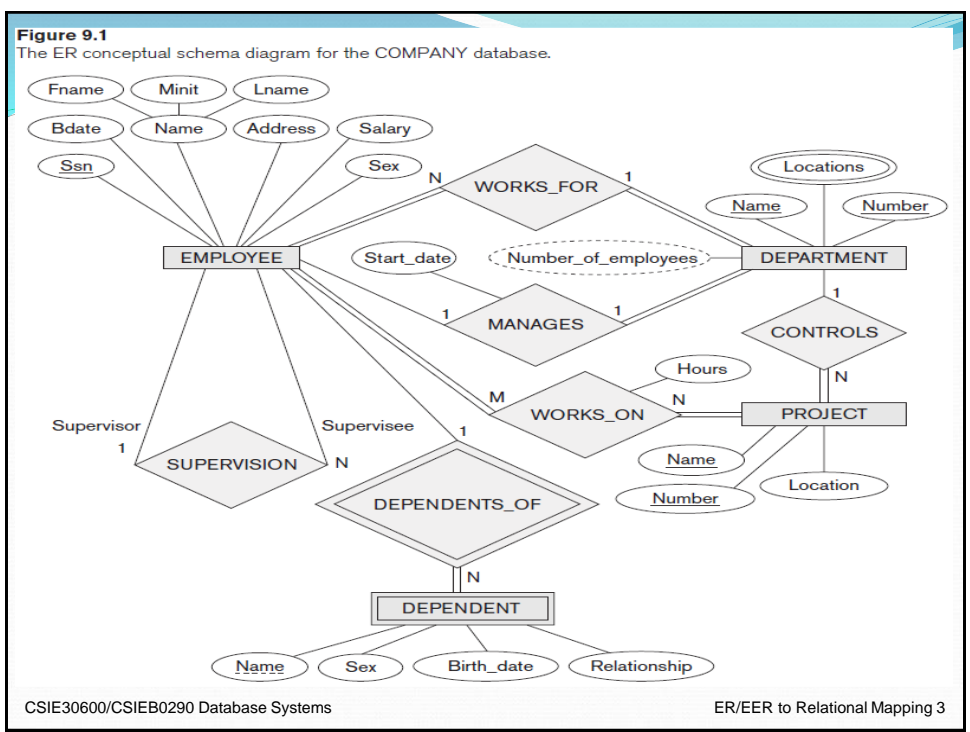

Mapping Algorithm (Step 1)


- **Step 1: Mapping of Regular Entity Types.**
 - For each **regular (strong) entity type** E, create a **relation** R that includes all the **simple attributes** of E.
 - Choose one of the keys of E as the **primary key** for R.
 - If the chosen key of E is composite, the set of simple attributes together form the primary key of R.
- **Example:** Create the relations EMPLOYEE, DEPARTMENT, and PROJECT corresponding to the regular entities in the ER diagram.
 - SSN, DNUMBER, and PNUMBER are the primary keys for the relations EMPLOYEE, DEPARTMENT, and PROJECT as shown.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 5

ER to Relational - Step 1

- **Step 1:** Process **regular entity types**. (entity relations)

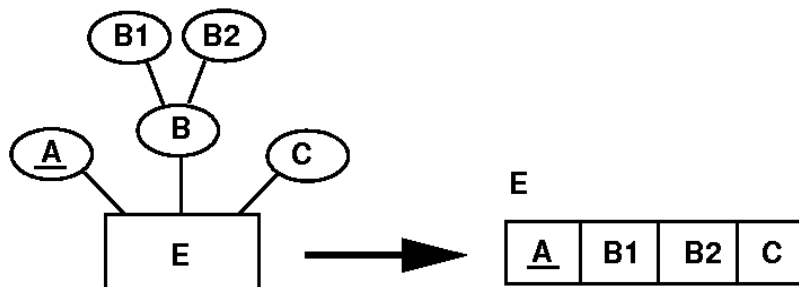

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 6

Mapping Algorithm (Step 2)


- **Step 2: Mapping of Weak Entity Types**
 - For each **weak entity type** W in the ER schema with owner entity type E, create a relation R & include all simple attributes (or simple components of composite attributes) of W as attributes of R.
 - Also, include as **foreign key** attributes of R the **primary key attribute(s)** of the **owner(s)**.
 - The primary key of R is the **combination** of the **primary key(s) of the owner(s)** and the **partial key** of the weak entity type W, if any.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 7

ER to Relational - Step 2

- **Step 2: Process weak entity types.**

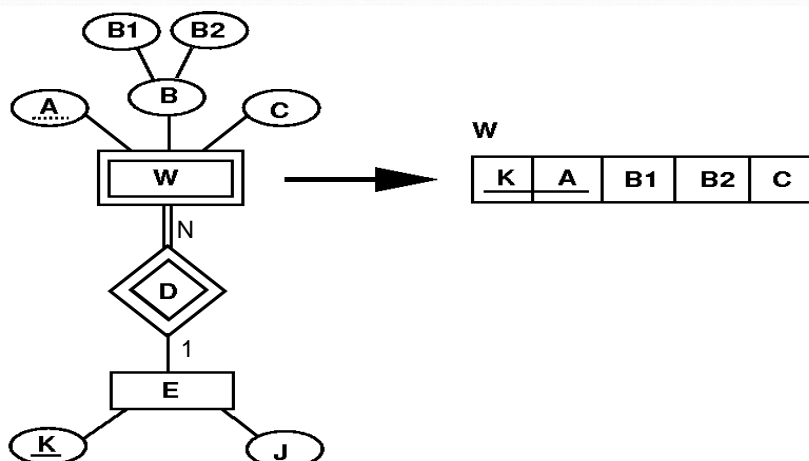

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 8

Step 2 (contd.)

- **Example:** Create the relation DEPENDENT in this step to correspond to the weak entity type DEPENDENT.
 - Include the primary key SSN of the EMPLOYEE relation as a foreign key attribute of DEPENDENT (renamed to ESSN).
 - The primary key of the DEPENDENT relation is the combination {ESSN, DEPENDENT_NAME} because DEPENDENT_NAME is the partial key of DEPENDENT.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 9

ER-to-Relational Mapping Algorithm (cont.)

Figure 9.3

Illustration of some mapping steps.

- (a) *Entity* relations after step 1.
 (b) Additional *weak entity* relation after step 2.
 (c) *Relationship* relations after step 5.
 (d) Relation representing multivalued attribute after step 6.

(a) EMPLOYEE

Fname	Minit	Lname	<u>Ssn</u>	Bdate	Address	Sex	Salary
-------	-------	-------	------------	-------	---------	-----	--------

DEPARTMENT

<u>Dname</u>	<u>Dnumber</u>
--------------	----------------

PROJECT

<u>Pname</u>	<u>Pnumber</u>	Plocation
--------------	----------------	-----------

(b) DEPENDENT

<u>Essn</u>	<u>Dependent_name</u>	Sex	Bdate	Relationship
-------------	-----------------------	-----	-------	--------------

(c) WORKS_ON

<u>Essn</u>	<u>Pno</u>	Hours
-------------	------------	-------

(d) DEPT_LOCATIONS

<u>Dnumber</u>	<u>Dlocation</u>
----------------	------------------

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 10

Mapping Algorithm (Step 3)


- **Step 3: Mapping of Binary 1:1 Relation Types**
 - For each binary 1:1 relationship type R in the ER schema, identify the relations S and T that correspond to the entity types participating in R.
- Three possible approaches:
 1. **Foreign Key approach:** Choose one of the relations—say S—and include a foreign key in S the primary key of T. It is better to choose an entity type with **total participation** in R in the role of S.
 - **Example:** 1:1 relation MANAGES is mapped by choosing the participating entity type DEPARTMENT to serve in the role of S, because its participation in the MANAGES relationship type is total.

Step 3 (cont.)

2. **Merged relation option:** An alternate mapping of a 1:1 relationship type is possible by merging the two entity types and the relationship into a single relation. This may be appropriate when **both participations are total**.
3. **Cross-reference or relationship relation option:** The third alternative is to set up a **third relation R** for the purpose of cross-referencing the primary keys of the two relations S and T representing the entity types.

ER to Relational - Step 3

- **Step 3:** Process **1:1** relationships.

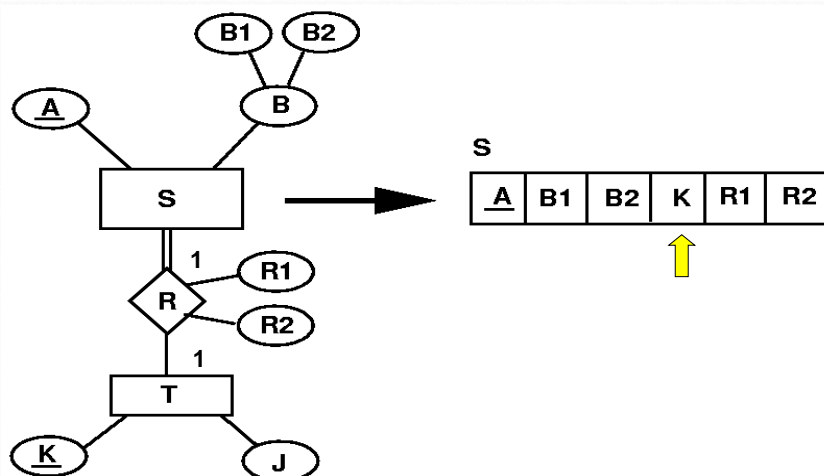

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 13

Mapping Algorithm (Step 4)


- **Step 4: Mapping of Binary 1:N Relationship Types.**
 - For each regular binary 1:N relationship type R, identify the relation S that represent the participating entity type at the **N-side** of the relationship type.
 - Include as **foreign key in S** the **primary key of the relation T** that represents the other entity type participating in R.
 - Include any simple **attributes** of the 1:N relation type as attributes of S.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 14

ER to Relational - Step 4

- **Step 4:** Process 1:N relationships.

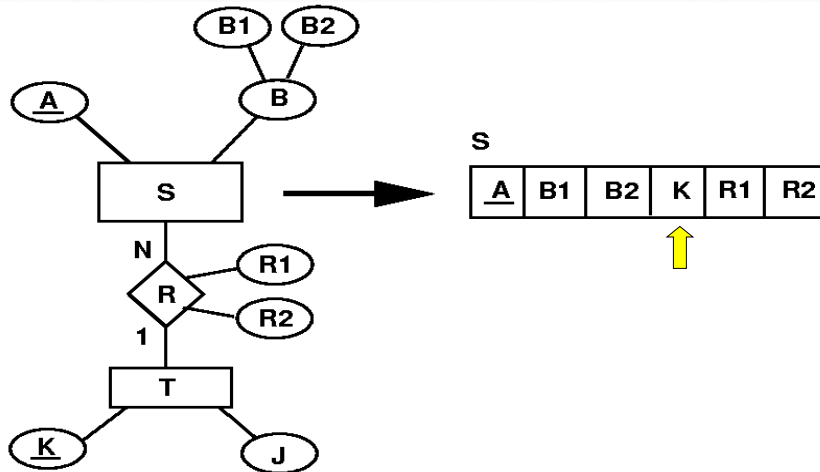

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 15

Step 4 (cont.)

- Example: 1:N relationship types WORKS_FOR, CONTROLS, and SUPERVISION in the figure.
 - For WORKS_FOR we include the primary key DNUMBER of the DEPARTMENT relation as foreign key in the EMPLOYEE relation and call it DNO.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 16

Mapping Algorithm (Step 5)


- **Step 5: Mapping of Binary M:N Relationship Types.**
 - For each regular binary M:N relationship type R, **create a new relation S** to represent R.
 - Include as **foreign key** attributes in S the **primary keys** of the relations that represent the participating entity types; *their combination will form the primary key* of S.
 - Also include any simple **attributes** of the M:N relationship type (or simple components of composite attributes) as attributes of S.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 17

ER to Relational - Step 5

- **Step 5: Process M:N relationships.**

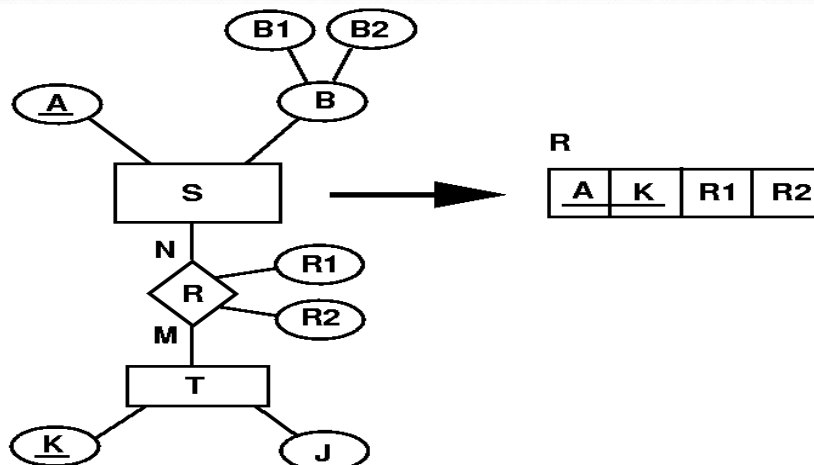

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 18

Step 5 (contd.)


- Example: The M:N relationship type WORKS_ON from the ER diagram is mapped by creating a relation WORKS_ON in the relational database schema.
 - The primary keys of the PROJECT and EMPLOYEE relations are included as foreign keys in WORKS_ON and renamed PNO and ESSN, respectively.
 - Attribute HOURS in WORKS_ON represents the HOURS attribute of the relation type. The primary key of the WORKS_ON relation is the combination of the foreign key attributes {ESSN, PNO}.

Mapping Algorithm (Step 6)

- **Step 6: Mapping of Multivalued attributes.**
 - For each **multivalued attribute** A, create a **new relation** R.
 - This relation R will include an attribute corresponding to A, plus the **primary key** attribute K-as a **foreign key** in R-of the relation that represents the entity type of relationship type that has A as an attribute.
 - The primary key of R is the combination of A and K. If the multivalued attribute is composite, we include its simple components.

ER to Relational - Step 6

- **Step 6:** Process **multivalued** attributes.

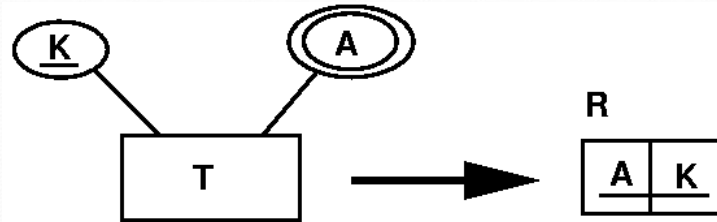

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 21

Step 6 (contd.)

- **Example:** The relation DEPT_LOCATIONS is created.
 - The attribute DLOCATION represents the multivalued attribute LOCATIONS of DEPARTMENT, while DNUMBER-as foreign key-represents the primary key of the DEPARTMENT relation.
 - The primary key of R is the combination of {DNUMBER, DLOCATION}.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 22

Mapping Algorithm (Step 7)


- **Step 7: Mapping of N-ary Relationship Types.**
 - For each n-ary relationship type R, where $n > 2$, create a **new relation** S to represent R.
 - Include as foreign key attributes in S the **primary keys** of the relations that represent the **participating entity types**.
 - Also include any simple **attributes** of the n-ary relationship type (or simple components of composite attributes) as attributes of S.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 23

ER to Relational - Step 7

- **Step 7:** Process **n-array** relationship type for $n > 2$.

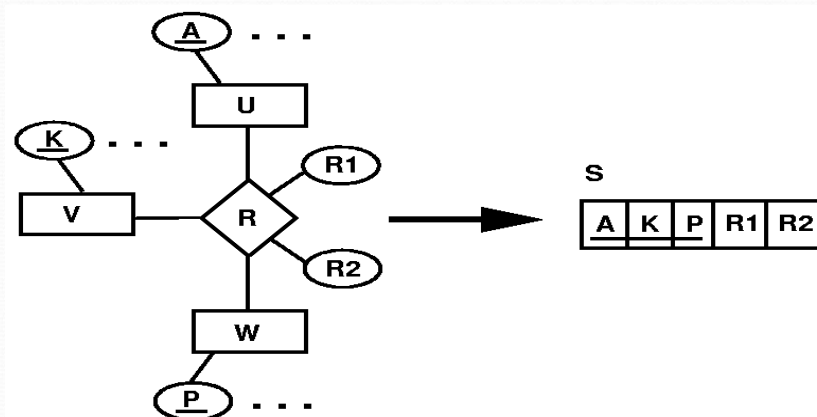

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 24

Summary of Mapping for ER Model Constructs

Table 9.1 Correspondence between ER and Relational Models

ER MODEL	RELATIONAL MODEL
Entity type	<i>Entity</i> relation
1:1 or 1:N relationship type	Foreign key (or <i>relationship</i> relation)
M:N relationship type	<i>Relationship</i> relation and <i>two</i> foreign keys
<i>n</i> -ary relationship type	<i>Relationship</i> relation and <i>n</i> foreign keys
Simple attribute	Attribute
Composite attribute	Set of simple component attributes
Multivalued attribute	Relation and foreign key
Value set	Domain
Key attribute	Primary (or secondary) key

Mapping EER Model Constructs to Relations

- **Step 8: Mapping Specialization or Generalization.**
 - Convert each specialization with ***m* subclasses** $\{S_1, \dots, S_m\}$ and generalized **superclass** ***C*** with attributes $\{k, a_1, \dots, a_n\}$ and *k* is the (primary) key, into relational schemas:
 - Option 8A: Multiple relations-Superclass and subclasses
 - Option 8B: Multiple relations-Subclass relations only
 - Option 8C: Single relation with one type attribute
 - Option 8D: Single relation with multiple type attributes

Mapping EER Model Constructs to Relations


- **Option 8A: Multiple relations-Superclass and subclasses**
 - Create a **relation L** for **C** with attributes $\text{Attrs}(L) = \{k, a_1, \dots, a_n\}$ and $\text{PK}(L) = k$. Create a **relation Li** for **each subclass Si**, $1 < i < m$, with the attributes $\text{Attrs}(Li) = \{k\} \cup \{\text{attributes of } Si\}$ and $\text{PK}(Li) = k$. This option works for any specialization (total or partial, disjoint or over-lapping).

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 27



EER to Relational - Step 8

- **Step 8:** Process **superclass/subclass** relationships.
 - **Option 8A:** Create a relation for the superclass and a relation for each subclass with key attributes from the superclass.

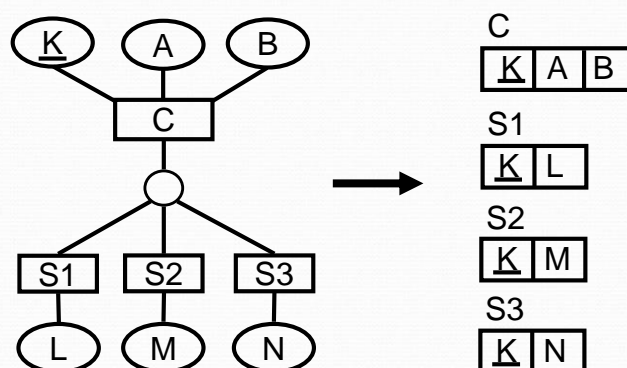

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 28

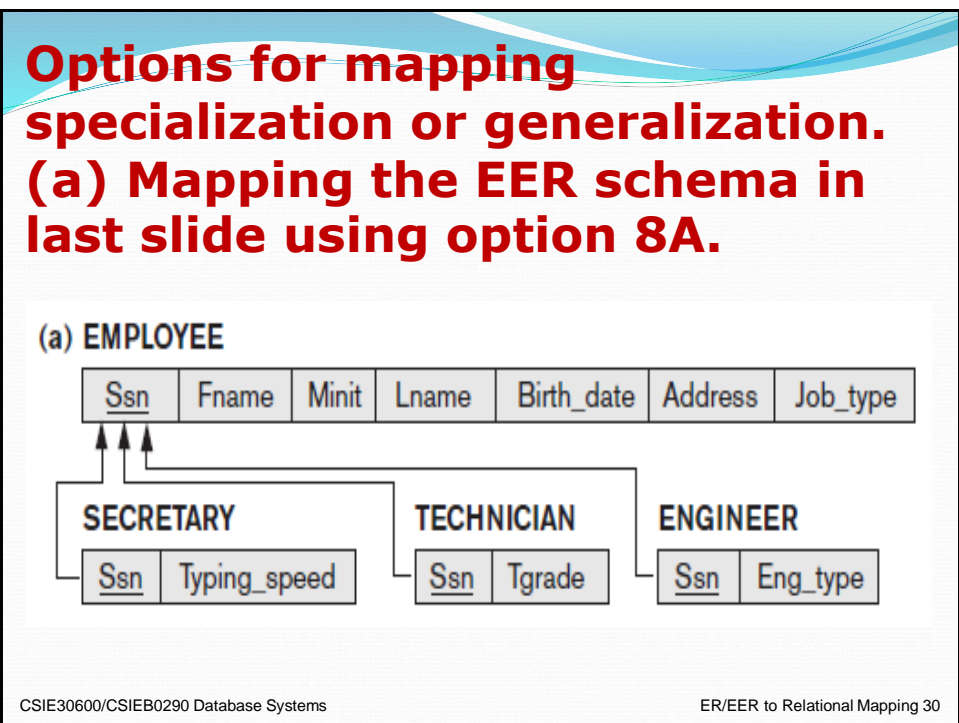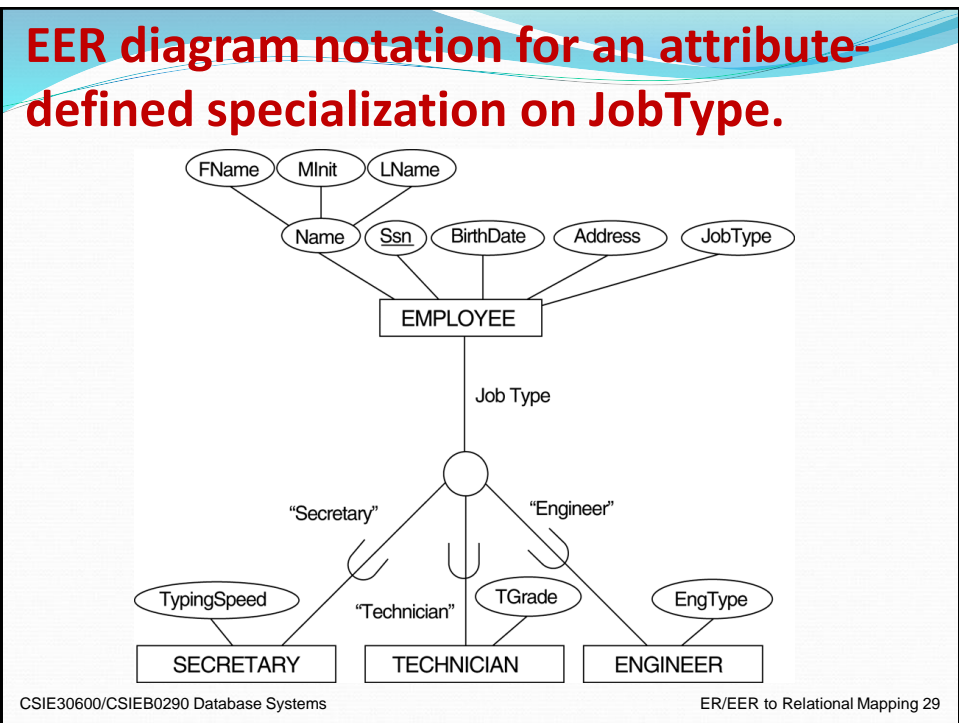

EER to Relational - Option 8B


- **Option 8B: Multiple relations-Subclass relations only**
 - Create a **relation L_i for each subclass S_i** , $1 < i < m$, with the attributes $\text{Attr}(L_i) = \{\text{attributes of } S_i\} \cup \{k, a_1, \dots, a_n\}$ and $\text{PK}(L_i) = k$. This option **only works for** a specialization whose subclasses are **total** (every entity in the superclass must belong to (at least) one of the subclasses).

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 31

EER to Relational - Option 8B


- **Option 8B:** Create a relation for each subclass with all attributes of the superclass.

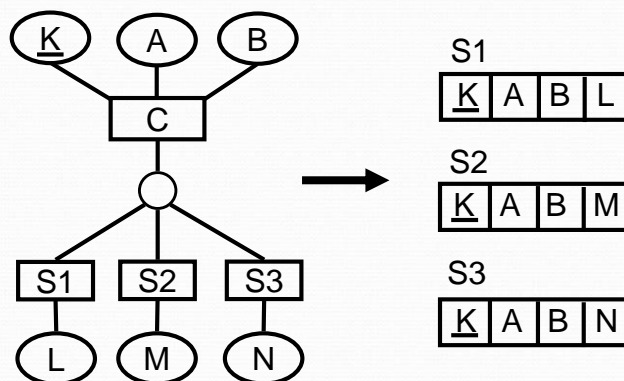

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 32

Generalization. (b) Generalizing CAR and TRUCK into the superclass VEHICLE.

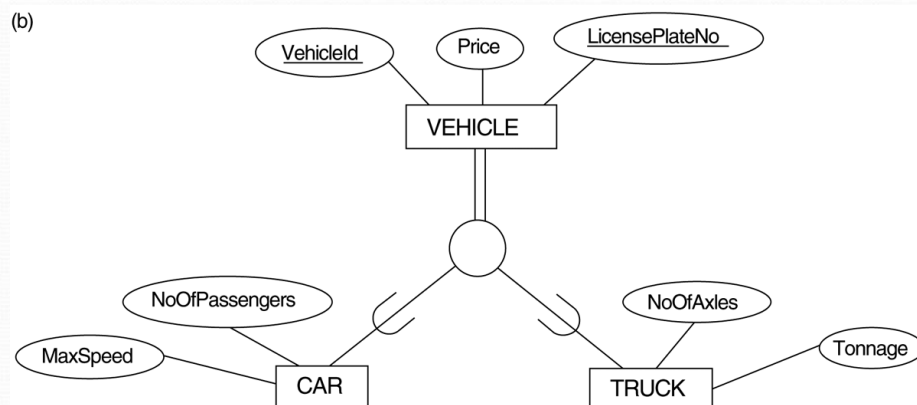

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 33

Options for mapping specialization or generalization.

(b) Mapping the EER schema using option 8B.

(b) CAR

<u>Vehicle_id</u>	License_plate_no	Price	Max_speed	No_of_passengers
-------------------	------------------	-------	-----------	------------------

TRUCK

<u>Vehicle_id</u>	License_plate_no	Price	No_of_axles	Tonnage
-------------------	------------------	-------	-------------	---------

CSIE30600/CSIEB0290 Database Systems


ER/EER to Relational Mapping 34


EER to Relational - Option 8C

- **Option 8C: Single relation with one type attribute**
 - Create a **single relation** L with attributes $\text{Attrs}(L) = \{k, a_1, \dots, a_n\} \cup \{\text{attributes of } S_1\} \cup \dots \cup \{\text{attributes of } S_m\} \cup \{t\}$ and $\text{PK}(L) = k$. The attribute t is called a **type** (or **discriminating**) **attribute** that indicates the subclass to which each tuple belongs

EER to Relational - Option 8C

- **Option 8C: Create a single relation with all attributes of superclass and subclasses, and a **type attribute**.** (for *disjoin specialization*)

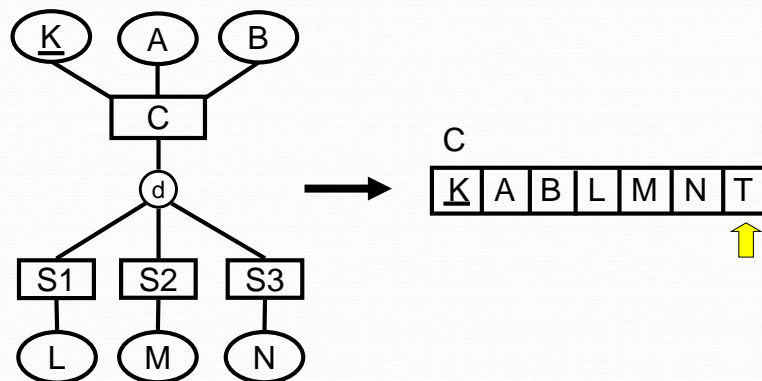

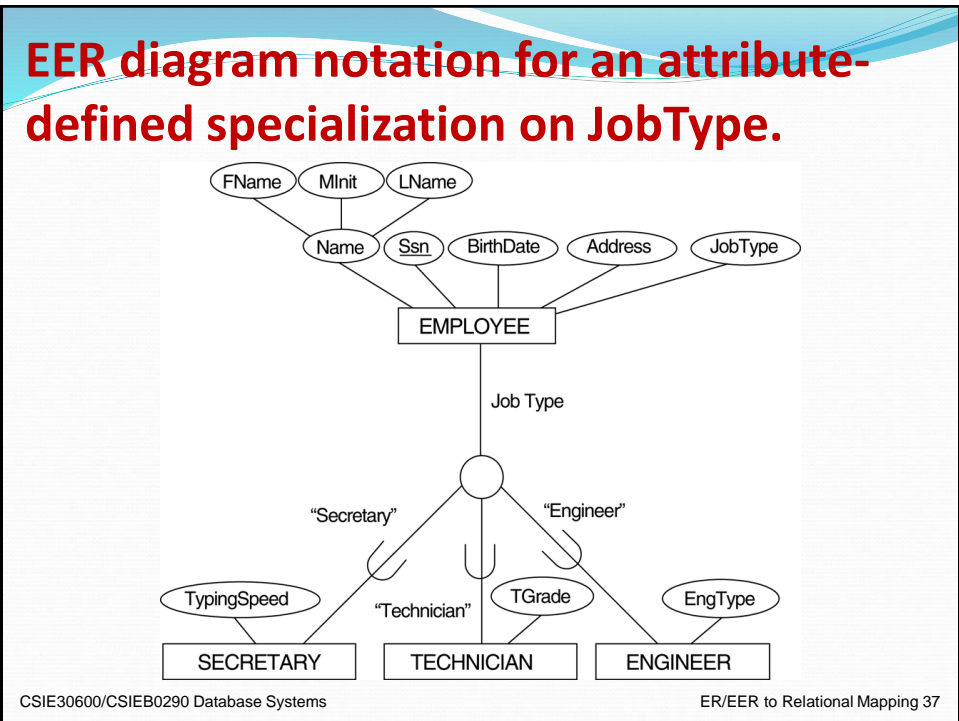

Options for mapping specialization or generalization.

(c) Mapping the EER schema in last slide using option 8C.

(c) EMPLOYEE

<u>Ssn</u>	Fname	Minit	Lname	Birth_date	Address	Job_type	Typing_speed	Tgrade	Eng_type
------------	-------	-------	-------	------------	---------	----------	--------------	--------	----------

CSIE30600/CSIEB0290 Database Systems ER/EER to Relational Mapping 38


EER to Relational - Option 8D

- **Option 8D: Single relation with multiple type attributes**


- Create a **single relation** L with attributes $\text{Attrs}(L) = \{k, a_1, \dots, a_n\} \cup \{\text{attributes of } S_1\} \cup \dots \cup \{\text{attributes of } S_m\} \cup \{t_1, t_2, \dots, t_m\}$ and $\text{PK}(L) = k$. Each $t_i, 1 < i < m$, is a **Boolean type attribute** indicating whether a tuple belongs to the subclass S_i .

EER to Relational - Option 8D

- **Option 8D: Create a single relation with all attributes of superclass and subclasses, and a set of **Boolean attributes**, one for each subclass. (for overlapping specialization)**

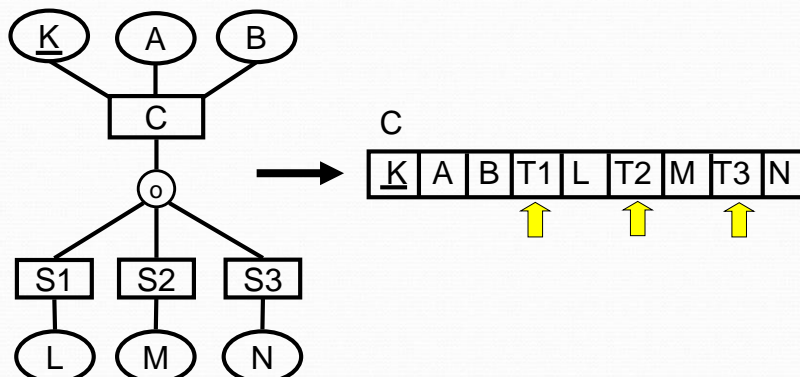

EER diagram notation for an overlapping (non-disjoint) specialization.

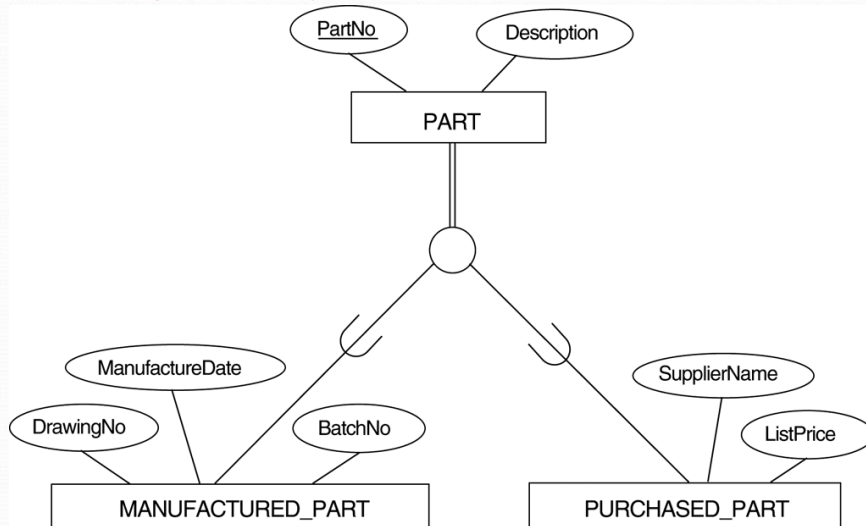

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 41

Options for mapping specialization or generalization.

(d) Using option 8D with Boolean type fields Mflag and Pflag.

(d) PART

<u>Part_no</u>	Description	Mflag	Drawing_no	Manufacture_date	Batch_no	Pflag	Supplier_name	List_price
----------------	-------------	-------	------------	------------------	----------	-------	---------------	------------



CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 42

Mapping of Shared Subclasses (Multiple Inheritance)


• Mapping of Shared Subclasses

- A shared subclass is a subclass of several classes, indicating **multiple inheritance**. These classes must all have the same key attribute; otherwise, the shared subclass would be modeled as a category.
- We can apply any of the options discussed in Step 8 to a shared subclass, subject to the restriction discussed in Step 8 of the mapping algorithm. Below both 8C and 8D are used for the shared class STUDENT_ASSISTANT.

CSIE30600/CSIEB0290 Database Systems

ER/EER to Relational Mapping 43


A specialization lattice with multiple inheritance for a UNIVERSITY database.

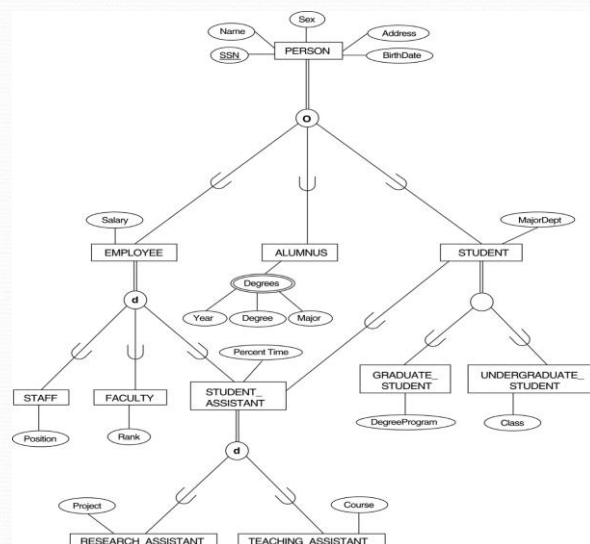

CSIE30600/CSIEB0290 Database Systems


ER/EER to Relational Mapping 44

Mapping the EER specialization lattice using multiple options.

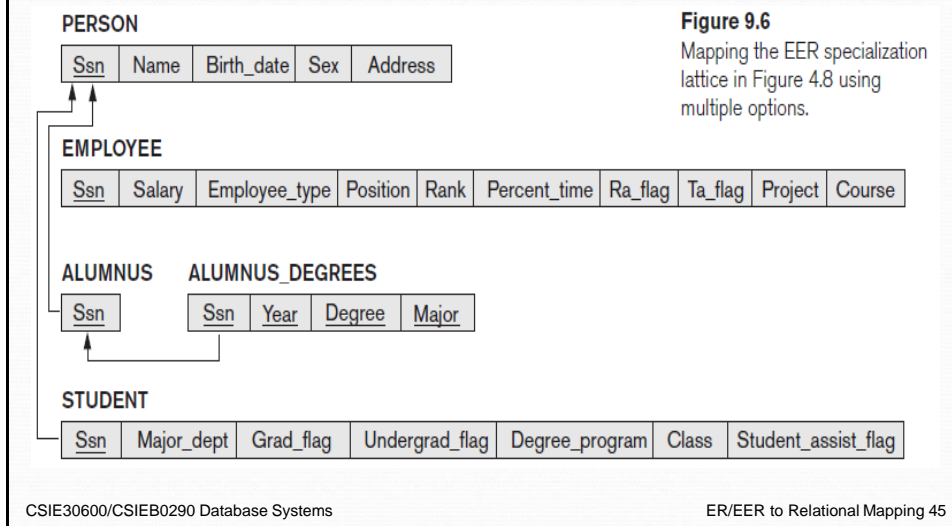

Mapping of Categories (Union Types) – Step 9

- **Step 9: Mapping of Union Types (Categories)**
 - Defining superclasses have different keys
 - Specify a new key attribute
 - **Surrogate key**

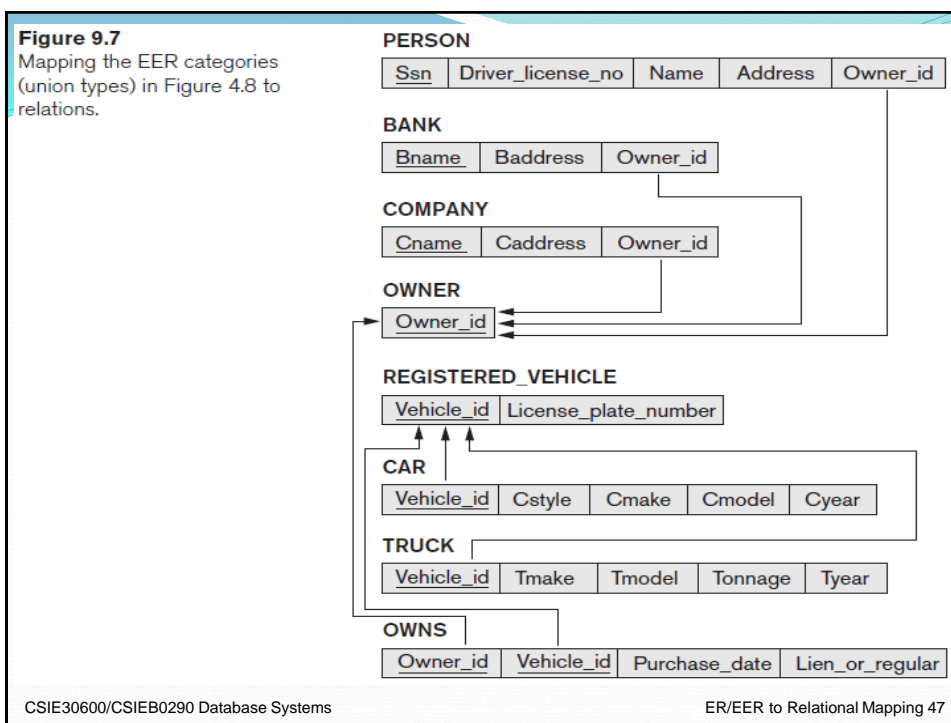

Summary

- **ER-to-Relational Mapping Algorithm**
 - Step 1: Mapping of Regular Entity Types
 - Step 2: Mapping of Weak Entity Types
 - Step 3: Mapping of Binary 1:1 Relation Types
 - Step 4: Mapping of Binary 1:N Relationship Types.
 - Step 5: Mapping of Binary M:N Relationship Types.
 - Step 6: Mapping of Multivalued attributes.
 - Step 7: Mapping of N-ary Relationship Types.
- **EER Model Constructs to Relations**
 - Step 8: Options for Mapping Specialization or Generalization.
 - Step 9: Mapping of Union Types (Categories).